


Inverter efficiency. Samsung quality



## Samsung Underceiling Range

R410A Inverter

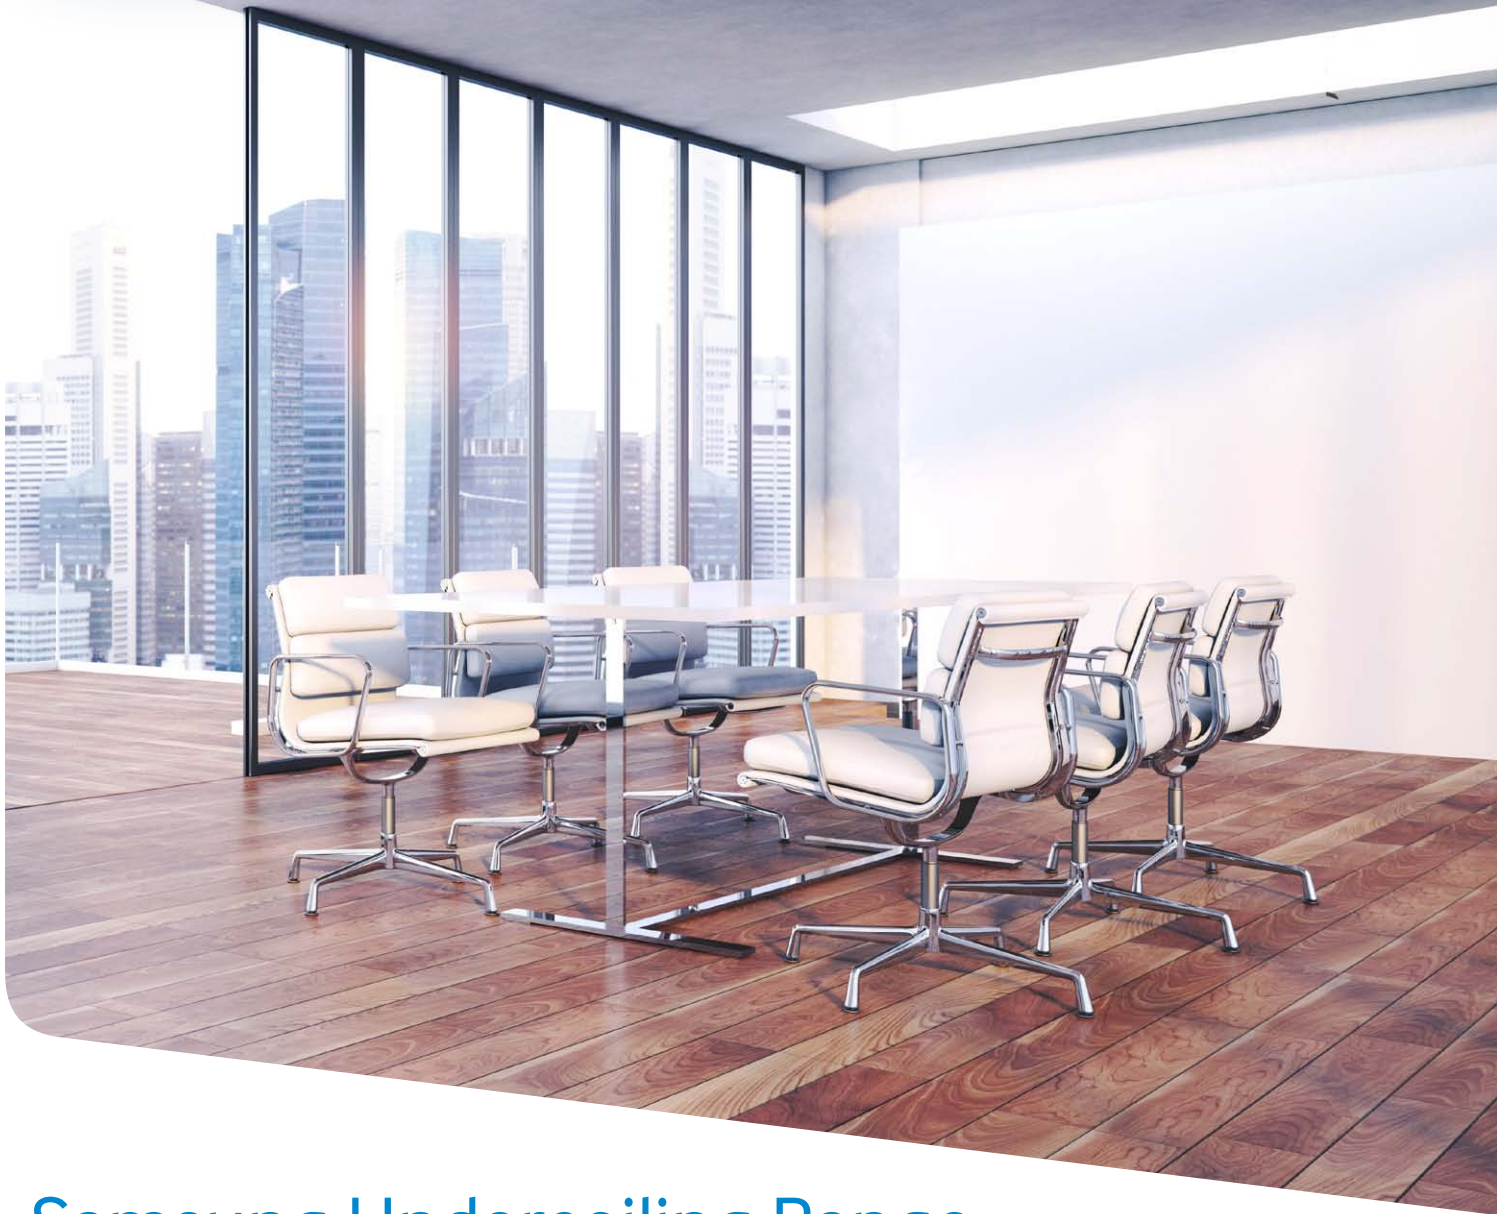

- Samsung quality with Inverter efficiency
- 4 Models: AC100 to AC160
- Max. cooling: 17.3kW/max. heating 19.00kW (AC 160 model)
- Airflow rate up to 34 CMM
- Max. piping length indoor to outdoor 75m
- Backed nationwide by Fourways Airconditioning South Africa



49m



fourways  
AIRCONDITIONING

SAMSUNG

# Samsung Underceiling Range - R410A Inverter

With its sleek elegant new design, the high-powered Samsung Underceiling range blends in with any décor. Inverter efficiency and an A+ Energy Grade (Cooling) ensures maximum electricity savings. Ideal for boardrooms, conference rooms, hotel lobbies and other commercial applications, an indoor-to-outdoor piping length of up to 75 metres allows for convenient placement of outdoor unit. As with all Samsung airconditioners, the new Underceiling range is backed nationwide by Fourways Airconditioning, with branches in all major metropolitan areas.



## SPECIFICATIONS

Type			Indoor Unit	AC100JNCDEH/EU	AC120JNCDEH/EU	AC140JNCDEH/EU	AC160JNCDEH/EU			
Model Name			Indoor Unit	AC100JXADGH/EU	AC120JXADGH/EU	AC140JXADGH/EU	AC160JXADGH/EU			
System	Mode		-	Heat Pump	Heat Pump	Heat Pump	Heat Pump			
	Capacity	Cooling(Min/Std/Max)		kW	2.80 / 10.00 / 12.00	3.50 / 12.00 / 13.50	4.30 / 14.00 / 15.40	4.30 / 15.00 / 17.30		
				Btu/h	9,600 / 34,100 / 40,900	11,900 / 40,900 / 46,100	14,700 / 47,800 / 52,500	14,700 / 51,200 / 59,000		
		Heating(Min/Std/Max)		kW	2.90 / 11.20 / 15.50	3.80 / 13.00 / 16.50	4.70 / 16.00 / 18.00	4.70 / 17.50 / 19.00		
				Btu/h	9,900 / 38,200 / 52,900	13,000 / 44,400 / 56,300	16,000 / 54,600 / 61,400	16,000 / 59,700 / 64,800		
	Power	Power Input (Nominal)	Cooling(Min/Std/Max)	kW	0.75 / 3.45 / 5.00	0.90 / 4.70 / 5.50	0.90 / 4.65 / 5.50	0.90 / 5.28 / 6.40		
			Heating(Min/Std/Max)	kW	0.65 / 3.15 / 5.50	0.70 / 3.75 / 5.60	0.80 / 4.43 / 5.70	0.80 / 4.86 / 6.50		
		Current Input (Nominal)	Cooling(Min/Std/Max)	A	1.60 / 5.40 / 7.50	1.70 / 7.20 / 9.50	1.70 / 7.10 / 9.50	1.70 / 8.20 / 9.80		
			Heating(Min/Std/Max)	A	1.40 / 4.90 / 9.00	1.50 / 5.80 / 9.10	1.70 / 6.80 / 8.80	1.70 / 7.50 / 10.00		
		MCA	A	14.70 (MCA)	14.70 (MCA)	14.70 (MCA)	14.70 (MCA)			
		MFA	A	16.20	16.20	16.20	16.20			
	Energy Efficiency	EER (Nominal Cooling)		-	2.90	2.55	3.01	2.84		
		COP (Nominal Heating)		-	3.56	3.47	3.61	3.60		
		Energy Grade		-	Energy Grade(C) A+	Energy Grade(C) A+	-	-		
				-	Energy Grade(H) A	Energy Grade(H) A+	-	-		
	Piping Connections	Liquid Pipe		Ø, mm	9.52	9.52	9.52	9.52		
				Ø, inch	3/8"	3/8"	3/8"	3/8"		
		Gas Pipe		Ø, mm	15.88	15.88	15.88	15.88		
				Ø, inch	5/8"	5/8"	5/8"	5/8"		
		Installation Limitation	Max. Length	m	50	50	75	75		
Max. Height			m	30	30	30	30			
Refrigerant	Type		-	R410A	R410A	R410A	R410A			
	Factory Charging		kg	2.80	2.90	3.20	3.50			
Indoor Unit	Power Supply			Ø, #, V, Hz	1,220-240,50	1,220-240,50	1,220-240,50	1,220-240,50		
	Fan	Air Flow Rate	High/Mid/Low	CMM	26.00 / 23.00 / 19.00	30.00 / 24.00 / 20.00	34.00 / 27.00 / 23.00	37.00 / 31.00 / 26.00		
				l/s	433.33 / 383.33 / 316.67	500.00 / 400.00 / 333.33	566.67 / 450.00 / 383.33	616.67 / 516.67 / 433.33		
	Drain	Drain Pipe		Ø,mm	VP20 (OD 25,ID 20)	VP20 (OD 25,ID 20)	VP20 (OD 25,ID 20)	VP20 (OD 25,ID 20)		
	Sound	Pressure	High/Mid/Low	dB(A)	Cooling		42.0 / 38.0 / 34.0	44.0 / 41.0 / 37.0	46.0 / 42.0 / 38.0	51.0 / 47.0 / 44.0
					Power		60.0	62.0	64.0	68.0
	External Dimension	Net Weight		kg	42.00	42.00	42.00	42.00		
		Shipping Weight		kg	48.00	48.00	48.00	48.00		
		Net Dimensions (WxHxD)		mm	1,650 x 675 x 235	1,650 x 675 x 235	1,650 x 675 x 235	1 650 x 675 x 235		
		Shipping Dimensions (WxHxD)		mm	1,739 x 758 x 321	1,739 x 758 x 321	1,739 x 758 x 321	1 739 x 758 x 321		
Outdoor Unit	Power Supply			Ø, #, V, Hz	3,4380-415,50	3,4380-415,50	3,4380-415,50	3,4380-415,50		
	Compressor	Type		-	Twin BLDC Rotary	Twin BLDC Rotary	Twin BLDC Rotary	Twin BLDC Rotary		
		Output		kW	2.82	4.12	4.12	4.01		
		Oil	Type		-	POE	POE	POE	POE	
	Fan		Air Flow Rate	Cooling	CMM	68.00	70.00	100.00	115.00	
		l/s			1,133.33	1,166.67	1,666.67	1,916.67		
	Sound	Pressure	Cooling/Heating	dB(A)	Cooling		52.0 / 54.0	54.0 / 56.0	53.0 / 54.0	56.0 / 58.0
					Power		69.0	70.0	70.0	73.0
	External Dimension	Net Weight		kg	72.00	79.00	90.00	96.00		
		Shipping Weight		kg	76.00	84.00	100.00	106.00		
		Net Dimensions (WxHxD)		mm	940 x 998 x 330	940 x 998 x 330	940 x 1,210 x 330	940 x 1,420 x 330		
		Shipping Dimensions (WxHxD)		m <sup>m</sup>	995 x 1,096 x 426	995 x 1,096 x 426	995 x 1,388 x 426	995 x 1,598 x 426		
	Operating Temp. Range	Cooling		°C	-15.0 ~ 50.0	-15.0 ~ 50.0	-15.0 ~ 50.0	-15.0 ~ 50.0		
		Heating		°C	-20.0 ~ 24.0	-20.0 ~ 24.0	-20.0 ~ 24.0	-20.0 ~ 24.0		

Due to Samsung's policy of constant improvement, specifications are subject to change without notice. E&OE.



Distributed & supported nationwide by Fourways Airconditioning:

JHB & Central: (011) 704-6320  
Kwa-Zulu Natal: (031) 579-1895  
Bloemfontein: 083 381 0074

Pretoria: (012) 643-0445  
Port Elizabeth: (041) 484-6413

W & N Cape: (021) 556-8292  
George: 082 380 0708

